



PetroXtractor[®] Well Oil Skimmer

- Allows existing 2" monitoring wells to be used as recovery wells
- Portable—can be moved from well to well
- Maintains skimming efficiency with fluctuating water level

- Removal rates up to 12 gph
- Underground packages with transfer capability
- Explosion proof; pneumatic and vapor tight systems
- Accepts all Abanaki accessories: timers, float switches, oil concentrators
- Removes oils pumps can't handle (Coaltar, Bunker C, etc.)

Petro Puck[™]

- Non-toxic bacteria break down and consume oil
- Cleaner fluid for disposal
- Use with oil skimmers
- Treats 1000 gallons of fluid
- No machinery, waste, measuring or monitoring



The portable Tote-It[®]

- 36 lb., one-piece portability
- Also for permanent installations with limited access areas
- Oil removal rates up to 12 gph (45 lph)
- Available in lengths up to 10 ft. c-c
- Available with 2" or 4" wide belts
- Different belt materials available
- Easier to use than absorbent pads without the mess


Q-VAC 100[™]

- Sucks up spills to maintain safety
- Removes coolant from machine sumps
- Maintenance free
- Runs on compressed air.
- Low noise level
- Doesn't foam up contents
- Easy to move



Mighty-Mini[®] SST

- Stainless steel construction
- 24 hour timer w/15min intervals
- Use in coolant sumps, parts washers, and plating tanks
- Easily hand-carried
- Oil removal rates up to 2 gph (7.6 lph)
- Designed for liquid level depths from 6" to 24" (15.2 cm to 61.0 cm)
- Belt and tail pulley can fit through a 2" (5.1 cm) bung hole
- Different belt materials available
- 110v and 220v fan-cooled motors available
- Very affordable




Contact Abanaki to get a copy of our Coolant Maintenance brochure, featuring our complete line of coolant maintenance products.

ISO 9000/2001
Company


ABANAKI OIL SKIMMERS

USA: 17387 Munn Road • Chagrin Falls, Ohio 44023
800-358-SKIM (7546) • (440) 543-7400 • FAX: (440) 543-7404
UK: Unit 13 • Avondale Business Centre • Woodland Way • Bristol BS15 1AW
0117 9616679 • FAX: 0117 9616687
www.abanaki.com


Abanaki accessories make it easy to customize your system for quick installation and optimal performance. Listed below are the most commonly requested items. More specialized accessories are available on request — contact the factory.




Mounting Stands and Adapters




Complete Skimming Systems



Float Switches

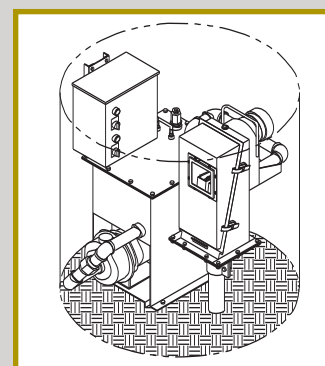


Underground Packages

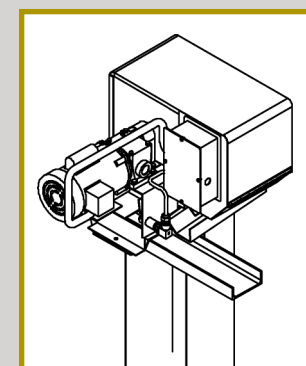

Heaters for Cold Weather

Oil Concentrator[®]

- Removes residual water
- Provides virtually complete oil/water separation
- Available on all Abanaki oil skimmers
- Uses no electricity, timers, sensors, pumps, or other moving parts
- Optional heater for high viscosity oils and low temperatures
- Removable sludge screen and drain plug facilitate routine maintenance
- Easy mounting to Abanaki skimmers

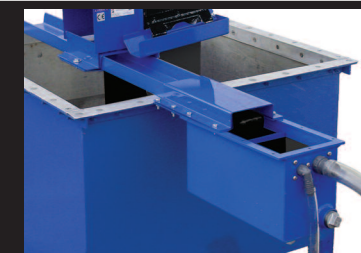

ISO 9000/2001
Company

Oil Skimmers

The Most Effective Way to Remove Oil and Grease From Water



Go With The Pro!

Skimmerman[™]

ABANAKI OIL SKIMMERS



Oil Skimmers for Every Application

Solving oil removal problems for over 30 years world wide, Abanaki's pledge is to work hand in hand with our customers to achieve our shared goal of successful oil/water separation.

Over the years, we have developed rugged, versatile units for many different industries. Our units are simple to operate, reliable, and require very little maintenance. With our wide assortment of skimmers and belt types we can efficiently handle hydrocarbons as thick as grease or as light as gasoline. Our different units have removal rates from 1–200 gph.

Give us a call. We have a skilled technical staff on hand to assist you with your application questions, along with any questions you may have about our skimmers. Or look us up at www.abanaki.com and learn more about our products online.

Other Abanaki Advantages

- Depending on model selected, skimmer belt material may be user specified—corrosion resistant steel or one of several specially engineered polymers.
- The standard material for belt wipers is Nitrile. CRV and Ceramic Hybrid are optional.
- Abanaki skimmers will perform well in a full range of liquid temperatures with pH levels between 2 and 13.
- Belt length is specified by the user (length restrictions apply on some units).
- The standard drive on all units is an electric motor and gear reducer. Other drive types available.
- Stainless Steel option available on most units.

Abanaki supplies custom designs and turnkey systems to meet specific application needs. Call your sales representative or the factory for specification assistance and a detailed quotation.

ABANAKI OIL SKIMMERS

USA: 17387 Munn Road • Chagrin Falls, Ohio 44023
800-358-SKIM (7546) • (440) 543-7400 • FAX: (440) 543-7404
UK: Unit 13 • Avondale Business Centre • Woodland Way • Bristol BS15 1AW
0117 9616679 • FAX: 0117 9616687

www.abanaki.com



Oil Grabber® Model 4

- Used when less capacity and smaller size are appropriate
- Oil removal rates up to 20 gph (76 lph)




Oil Grabber® Model 8²

- Abanaki's most popular model, suitable for most applications
- Oil removal rates up to 40 gph (151 lph)


Oil Grabber® Model MB

- Can be used in depths as shallow as one foot, or as deep as 100 feet
- Requires no tank modifications in most applications
- Operates in turbulent liquid using optional tail pulley cage and tether assembly
- Easy mounting and fast cleaning, with minimal maintenance

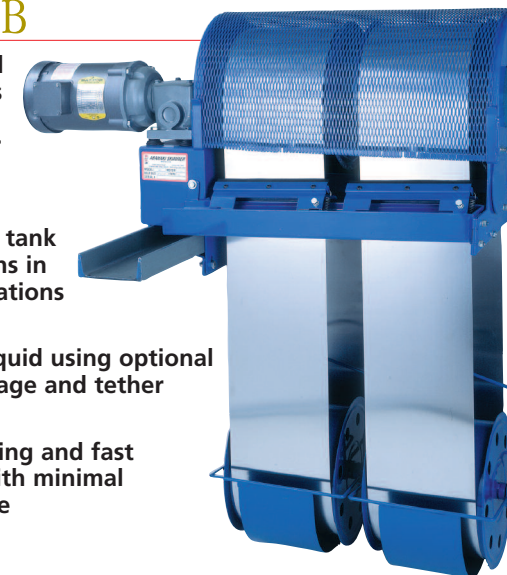

Grease Grabber®

- Rugged unit for the harshest applications
- Removes up to 160 gph (606 lph) of grease or heavy oils
- Unique hopper design provides efficient discharge of non-flowing greases
- Turnkey systems engineered upon request
- Components for special applications

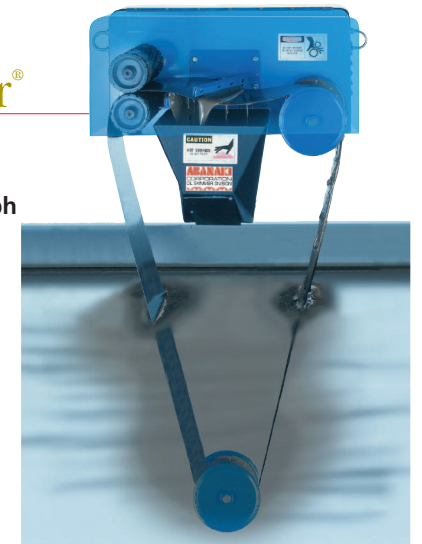

Oil Grabber® Advantages

- Single unit elevates and separates oil
- Lifts oil any distance without expensive pumps
- Maintains skimming efficiency with fluctuating fluid levels
- Easy mounting and fast cleaning, with minimal maintenance
- Requires no tank modifications in most applications
- Multiple mounting options for easy installation
- Floor mounting stands available
- Thermostatically controlled heaters available for higher viscosity oils and animal fats
- Optional timer and electrical controls
- Perfect for pre-treatment before filtration or coalescing
- Operates in turbulent liquids (requires some optional equipment)
- Hazardous duty and food grade options available
- Single and three phase motors are standard. Virtually any voltage is available.

