

MINIPURE®

GERMICIDAL ULTRAVIOLET WATER PURIFIERS




Model MIN-6
6 GPM

ABOUT US



Since 1963, we've been engineering and manufacturing germicidal ultraviolet equipment to prevent disease caused by contaminants in water, in air, and on surfaces. Our engineers bring each concept to a finished model, implementing stringent quality control procedures. Each product is manufactured with stainless steel and the highest quality materials to ensure the safety of personnel and room occupants. We stock an extensive inventory in our 37,500 square foot facility and ship throughout the world. Our knowledgeable team of UV-C specialists will provide effective and cost-conscious solutions for your home, business, industry, or institution.

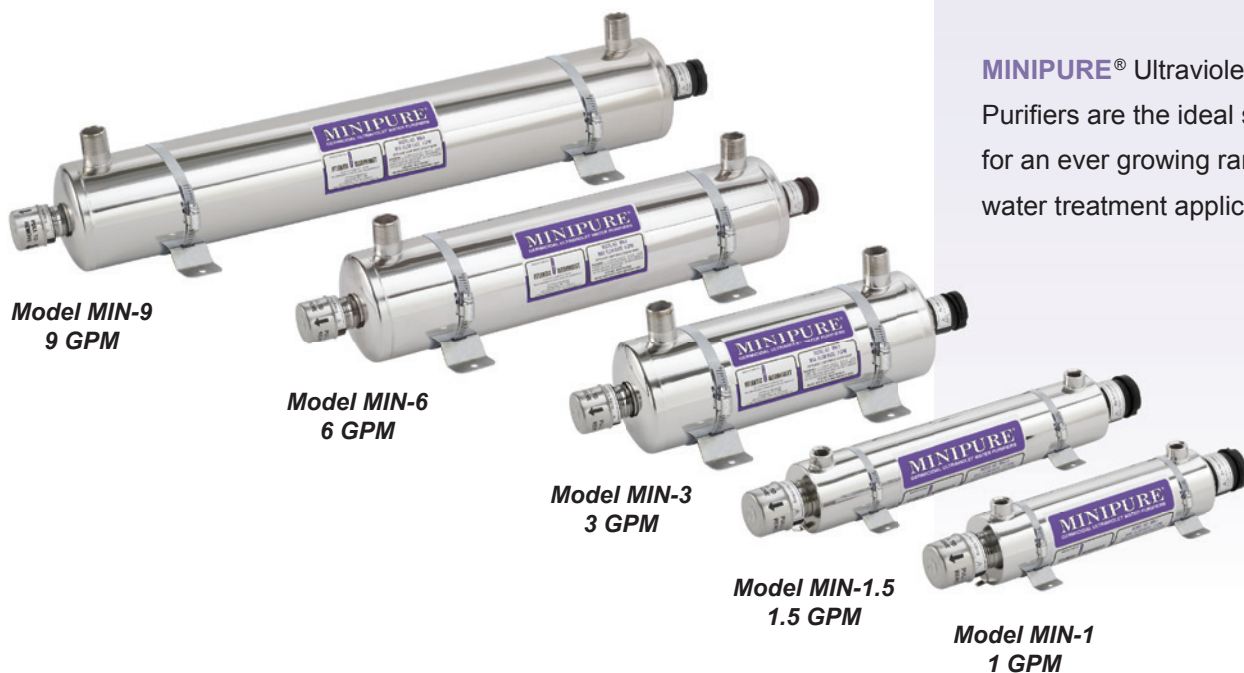

GERMICIDAL ULTRAVIOLET

Ultraviolet water purification is a unique and rapid method of water disinfection without the use of heat or chemicals.

MINIPURE® Germicidal Ultraviolet Water Purifiers utilize UV-C lamps producing ultraviolet wavelengths at 254 nanometers (nm)—a level that is lethal to bacteria, viruses, and other microorganisms present in water.

Through the years ultraviolet technology has become well established as a method of choice for effective and economical water disinfection.

MINIPURE® Ultraviolet Water Purifiers are the ideal solution for an ever growing range of water treatment applications.

PRINCIPLE OF OPERATION

ADVANTAGES

Effective

Virtually all microorganisms are susceptible to **MINIPURE®** ultraviolet disinfection.

Economical

Hundreds of gallons are purified for each penny of operating cost.

Safe

No danger of overdosing, no addition of chemicals.

Fast

Water is ready for use as soon as it leaves the purifier—no further contact time required.

Easy

Simple installation and maintenance. Compact purifiers require minimum space.

Automatic


Provides continuous disinfection without special attention or measurement.

Chemical Free

No chlorine taste or corrosion problems.

Versatile

Capacities available from 1 to 9 gallons per minute (GPM).

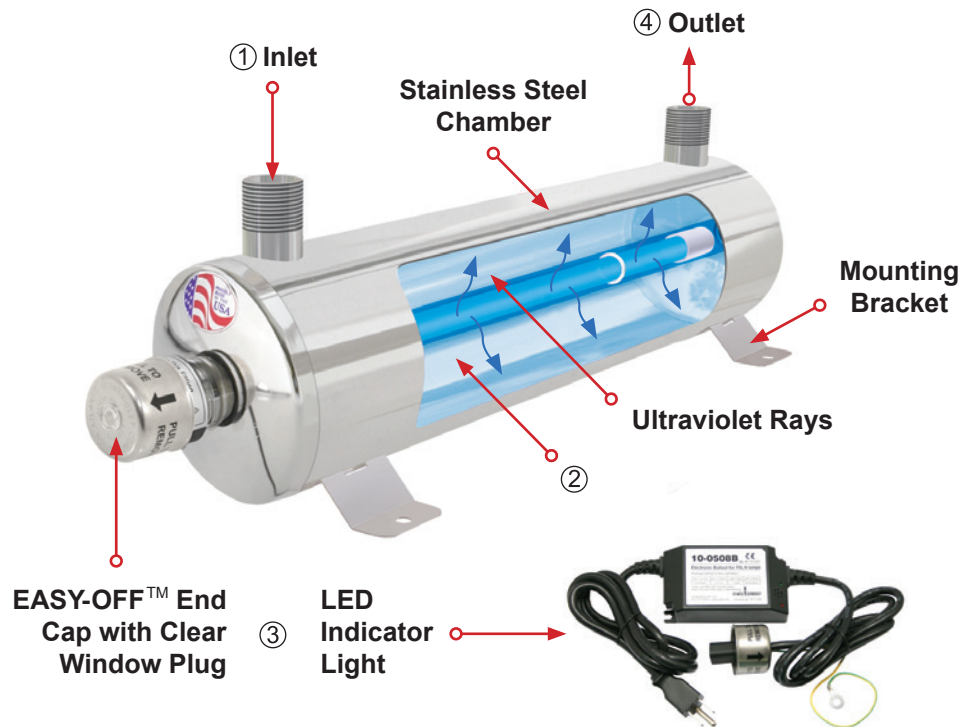

Model MIN-6 | 6 GPM

- ① The water enters the purifier and flows into the annular space between the quartz sleeve and the chamber wall.
- ② Within the chamber, water is exposed to intense germicidal ultraviolet radiation.
- ③ Transformer with LED indicator light and **EASY-OFF™** End Cap with clear window plug provide visual indication of germicidal lamp operation.
- ④ Water leaving the purifier is instantly ready for use.

SPECIAL FEATURES



**Model MIN 9
9 GPM**

EASY-OFF™ End Cap with clear window plug provides visual indication of germicidal lamp operation.

Stainless Steel Construction

Chamber and hardware are Type 304 stainless steel for dependable long life. Chamber is electropolished and passivated for an attractive finish and dependable service.

Quick Lamp Change

Exclusive, patented **EASY-OFF™** End Cap enables effortless lamp replacement without shut-down of water pressure or drainage of tank. No tools are required.

CRYSTAL CLEAR™ Quartz Sleeve (not shown)

Ensures optimum lamp output at normal potable water temperatures.

Surelite™ Electronic Ballast

Plug through style complete with red and green LED indicators and alarm that sounds if lamp is not working.

STER-L-RAY® Germicidal Ultraviolet Lamp (not shown)

Provides the utmost in quality, sustained output, and longevity.



**Promate™
Stainless Steel
Wall Mounting Kit**
Provides professional finish. Pre-drilled and ready for quick and easy mounting of water purifier. Suitable for Wall or Surface Mounting.



OPTIONAL ACCESSORIES



The **SENTRY™** Safety Sensor provides constant monitoring of the water purifier's ballast and germicidal lamp operation to give an indication of ballast and germicidal lamp status. The **SENTRY™** Safety Sensor is capable of operating an optional audio alarm and/or solenoid valve.

- Easy installation
- Plug **SENTRY™** into an electrical outlet, then plug water purifier into **SENTRY™**
- Operates optional solenoid valve and/or audio alarm
- Easily adaptable for use with other water purifier brands
- Warns of lamp failure
- Available for 120v 50/60Hz or 220v 50/60Hz water purifiers operating with electronic ballasts
- Available for use with most **Bio-Logic®**, **MINIPURE®**, **MIGHTY PURE®** and **SANITRON®** models



Promate™ Audio Alarm
Activated by the **SENTRY™** and alerts user to any malfunction detected.



Promate™ Elapsed Time Indicator
Real-time, non-resettable display of accumulated operating hours.



Promate™ Solenoid Valve
Operates in conjunction with **SENTRY™** and prevents flow during detected malfunctions. Durable brass construction. Available for models MIN-3, MIN-6, and MIN-9.



Promate™ Time Delay Mechanism
Operates with **SENTRY™** and solenoid valve to provide a 2-minute warm-up period for lamp to achieve full germicidal output.



SureFLO™ Flow Control Valve
Limits water flow to rated capacities. Available in PVC and stainless steel.



Promate™ Safety Glasses
Safety eyewear should be used as general-purpose safety protection and for additional shielding from germicidal ultraviolet rays.



Promate™ Face Shield
Lightweight visor with adjustable headgear provides eye and face protection from germicidal UV rays.

Options may be obtained at time of **MINIPURE®** purchase or added at a later date. For further details visit **AtlanticUltraviolet.com**.

INSTALLATION & MAINTENANCE

The purifier is installed horizontally as close as possible to the point of use. Connection of the inlet and outlet to water supply and insertion of power plug into 3-wire grounded GFCI grounded outlet is all that is required.

Ordinary maintenance consists of routine cleaning the quartz sleeve once monthly or more frequently where conditions dictate. Lamp replacement is recommended every 10,000 hours of operation (approximately 12 months of continuous service).

GERMICIDAL ULTRAVIOLET DOSAGE



Germicidal lamps provide effective protection against microorganisms. A small cross-section is shown below.

ORGANISM	ALTERNATE NAME	TYPE	DISEASE	DOSE*
<i>Bacillus subtilis</i> spores	<i>B. subtilis</i>	Bacterium		22.0
<i>Bacteriophage</i>	Phage	Virus		6.60
<i>Coxsackie A2</i>		Virus	Intestinal Infection	6.30
<i>Shigella dysenteriae</i>		Bacterium	Bacterial Dysentery	4.20
<i>Escherichia coli</i>	<i>E. coli</i>	Bacterium	Food Poisoning	6.60
<i>Fecal coliform</i>		Bacterium	Intestinal Infection	6.60
<i>Hepatitis A</i>	Infectious Hepatitis virus	Virus	Hepatitis of the Liver	8.0
<i>Influenza</i>	Flu virus	Virus	Influenza	3.40
<i>Legionella pneumophila</i>		Bacterium	Legionnaires' Disease	12.30
<i>Salmonella typhi</i>		Bacterium	Typhoid Fever	7.0
<i>Staphylococcus aureus</i>	Staph	Bacterium	Food Poisoning, Toxic Shock Syndrome, etc.	6.60
<i>Streptococcus pyogenes</i>	Strep	Bacterium	Strep Throat	.80

When used as directed to disinfect clear water, **MINIPURE®** Water Purifiers provide a UV-C dose in excess of 30.0 millijoules per square centimeter (mJ/cm²).

* Nominal Ultraviolet dosage (mJ/cm²) necessary to inactivate better than 99% of specific microorganism. Visit Ultraviolet.com/microorganisms-inactivated for complete listing.

OPERATING CHARACTERISTICS

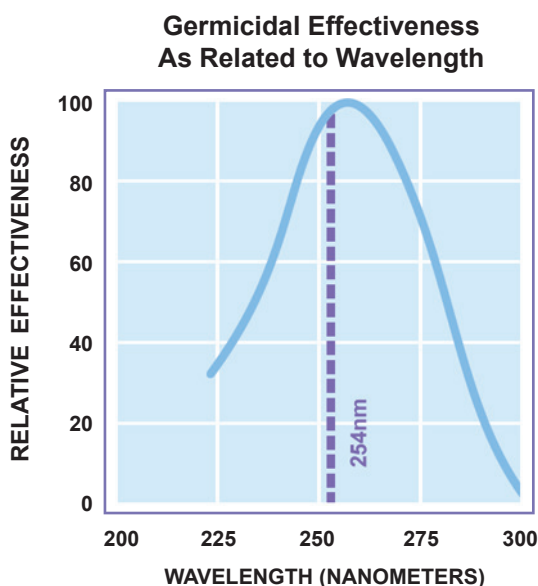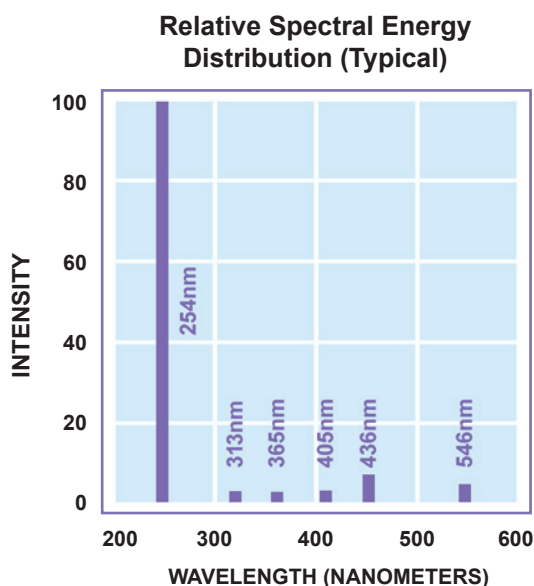

Approximately 95% of the ultraviolet energy emitted from **STER-L-RAY®** germicidal lamps is at 254 nanometers, the region of germicidal effectiveness most destructive to bacteria, mold, and viruses.

GENUINE **STER-L-RAY®** GERMICIDAL ULTRAVIOLET LAMPS

STER-L-RAY® Germicidal Ultraviolet Lamps are shortwave, low pressure tubes that produce ultraviolet wavelengths lethal to microorganisms.

STER-L-RAY® Germicidal Ultraviolet Lamps are well suited to applications requiring high ultraviolet intensity, such as water purification.

STER-L-RAY® Preheat Germicidal Ultraviolet Lamps are operated by a preheat-start circuit that employs an economical ballast. The preheat circuit requires four electrical connections per lamp and a slight to moderate delay is needed to start the lamp.

STER-L-RAY® and the **STER-L-RAY®** logo are trademarks of Atlantic Ultraviolet Corporation®.

CAUTION: Exposure to direct or reflected germicidal ultraviolet rays will cause painful eye irritation and reddening of the skin. Personnel subject to such exposure must wear suitable face shield, gloves, and protective clothing.

Hg - LAMP CONTAINS MERCURY, manage in accord with disposal laws, see: LampRecycle.org.



GERMICIDAL LAMP DATA

The lamps listed below have been especially developed and are recommended for use with **MINIPURE®** Water Purifiers. All **STER-L-RAY®** lamps used in **MINIPURE®** Water Purifiers are low pressure type which afford the maximum efficiency in producing the required germicidal rays. In addition, has advantage of high efficiency and low power requirements.

Lamp Number	Purifier Model No.	Nominal Lamp Length	Power Consumption ①	Ultraviolet Output ②	Rated Effective Life
05-1119-R	MIN-1	8-11/32" (212mm)	10 Watts	2.3 Watts	10,000 Hrs
05-1366-R	MIN-1.5	11-19/64" (287mm)	14 Watts	3.7 Watts	10,000 Hrs
05-1366-R	MIN-3	11-19/64" (287mm)	14 Watts	3.7 Watts	10,000 Hrs
05-1370-R	MIN-6	17-5/32" (436mm)	21 Watts	8.0 Watts	10,000 Hrs
05-0097A-R	MIN-9	24-13/32" (620mm)	30 Watts	10.4 Watts	10,000 Hrs

① Wattage is lamp watts only and does not include ballast loss (approximate).

② Maximum rated output at 254 nanometers.

STANDARD MODELS



**Model MIN-6
6 GPM**

WATER QUALITY RECOMMENDATIONS

Maximum Concentration Levels Before Ultraviolet

<i>Turbidity</i>	<i>5 NTU</i>
<i>Suspended Solids</i>	<i>10 mg/L</i>
<i>Color</i>	<i>None</i>
<i>Iron</i>	<i>0.3 mg/L</i>
<i>Manganese</i>	<i>0.05 mg/L</i>
<i>pH</i>	<i>6.5–9.5</i>
<i>Hardness</i>	<i>6 gpg</i>

Effectively treating water with higher concentration levels than listed above can be accomplished, but may require added measures to improve water quality to treatable levels.

Model	Gallons Per Minute	Gallons Per Hour	Inlet and Outlet ①	Replacement Lamps	Power Consumption ②	Dimensions (Inches)			Shipping Data (lbs.)	
						Length	Width	Height	Gross Wt.	Net Wt.
MIN-1	1	60	1/4" NPT	05-1119-R	14 Watts	12-3/8	2-1/2	3-1/8	6	5
MIN-1.5	1.5	90	1/4" NPT	05-1366-R	16 Watts	15-13/32	2-1/2	3-1/8	7	6
MIN-3	3	180	3/4" NPT	05-1366-R	16 Watts	16-17/32	4-1/4	5-3/4	10	9
MIN-6	6	360	3/4" NPT	05-1370-R	24 Watts	22-17/32	4-1/4	5-3/4	11	10
MIN-9	9	540	3/4" NPT	05-0097A-R	34 Watts	29-17/32	4-1/4	5-3/4	14	12

- Maximum recommended operating pressure for all purifiers is 100 psi.
 - Pressure drop at maximum recommended flow rate is 5 psi or less.
 - Flow rates are based on Maximum Concentration Levels.
 - Consult factory with specific power requirements.
 - All data shown above reflects 120 volt 50/60 Hz operation.
- MINIPURE®** Ultraviolet Water Purifiers are available with various power options, consult factory.

- ① MIN-1 & MIN-1.5 have female pipe threads.
MIN-3, MIN-6 & MIN-9 have male pipe threads.
- ② Total power consumption including ballast loss (approximate).

APPLICATIONS FOR ULTRAVIOLET WATER PURIFICATION



Residential & Recreational

- Point of Use Installation
- Under the Sink
- Water Vending Machines
- Whole House Purification
- Well Water Disinfection
- Water Cistern Sterilizers
- Rural Water Systems
- Recreational Vehicles
- Motor Homes & Trailers
- Boats
- Hot Tubs & Spas
- Swimming Pools
- Fish Ponds
- Koi Ponds
- Water Gardens
- Lakes
- Ornamental Ponds
- Fountain Water Features
- Aquariums
- Hatcheries
- Rainwater Collection
- Water Dispensing Appliances

Transient Systems

- Resorts, Hotels, & Motels
- Ships, Yachts, Boats
- Campgrounds
- Restaurants
- Water Parks
- Amusement Parks
- Golf Course Water Holes

Community Systems

- Apartment Complexes
- Condominium Complexes
- Trailer Parks
- Rural Water
- Villages, Towns, Cities
- Farms & Ranches
- Animal Husbandry

Institution Systems

- Laboratories
- Hospital
- Clinics
- Maternity Areas
- Labor & Delivery Areas
- Pathology Labs
- Kidney Dialysis Labs
- Nursing Homes
- Universities
- Schools
- Veterinary Clinics

Industry Systems

- Pharmaceutical Manufacturing
- Electronic Production
- Cosmetic Production
- Cooling Tower
- Power Generation
- Nurseries
- Food Industry
- Ice Makers
- Pulp & Paper Production
- Water Vending Machines
- Laundry Water
- Pure Wash Water
- Bottled Water
- Beer, Wine
- Soft Drinks
- Fruit Juices
- Edible Oils
- Liquid Sugar
- Sweeteners
- Water Based Lubricants
- Dairy Processing
- Cistern Applications
- Mollusk Hatcheries
- Water Preserves

Specialized

- TOC Reduction
- Ozone Reduction

APPLICATIONS FOR ULTRAVIOLET WATER PURIFICATION

The unique advantage of UV purification is that nothing is added to the water. When chemical methods of treatment are used, there may be handling problems, taste and odor problems, and undesirable chemical reactions with substances present in the water.

This difference is most significant when producing water for:

- Drinking or swimming
- Processing foods and bottled beverages
- Manufacturing cosmetics or pharmaceuticals
- Hospitals and research institutions
- Tertiary treatment of municipal or industrial wastewater

The Versatility of Germicidal UV Purification

UV purification provides germ-free potable water for home, institutional and municipal use, as in the following applications.

- Water wells: bacterial contamination of wells is unpredictable and may occur from seepage of surface water or sewage.
- The outlet side of water cisterns: most cisterns foster the proliferation of bacteria in untreated water.
- Swimming pools: to control bacteria, algae, and slime formation. It avoids the undesirable effects of heavily chlorinated swimming pool water by allowing substantial reduction of the use of chlorine.

UV purification provides bacteria-free food process water without the use of germicides, oxidants, algacides or chemical precipitants; particularly useful in the following applications where chlorine adversely affects flavor.

- Brewery, winery, soft drink, and water bottling industries: where biological purity of the water must be absolutely maintained in order to ensure product quality.
- Dairy products: for safeguarding against spoilage of cottage cheese and butter; certain psychrophilic bacteria are resistant to chlorine treatment.
- Sterile washwater: to guard against waterborne bacteria spoilage where vegetable, fruits, meats, fish, and other products must be washed in water before packaging.

UV purification is particularly useful in the following applications where chlorine-free, de-ionized and/or carbon filtered water are extensively employed. Unattended carbon filters and ion-exchange tanks act as incubators for bacteria accumulation.


- Electronics: in conjunction with de-ionized and high purity water systems.
- Pharmaceuticals and cosmetics: strict water treatment standards are necessary for strict maintenance of product's quality control.
- Biological laboratories: sterile water is required for testing and research work.
- Hospitals: provides pure water on demand for maternity labor and delivery areas, pathology labs, etc.

In industrial pollution control, UV purification affords an excellent end-treatment.

- Wastewater control systems: for selective use as a tertiary treatment for bacteria destruction after removal of chemicals and other objectionable ingredients.



COMPARISON OF ATLANTIC ULTRAVIOLET UV-C WATER PURIFIERS

FEATURES [S] - Standard [O] - Optional [✓] - Yes	Bio-Logic® Pure Water Pack™ 1.5 GPM	MINIPURE® 1 to 9 GPM	Ultimate® 4 to 9 GPM	MIGHTY★PURE® 3 to 20 GPM	SANITRON® 3 to 416 GPM	MEGATRON® 90 to 450 GPM
Chamber Material (Stainless Steel Type)	316	304	304	316	316	316
STER-L-RAY® Germicidal Ultraviolet Lamp	S	S	S	S	S	S
EASY-OFF™ End Cap	S	S	–	S	S	S
CRYSTAL CLEAR™ Quartz Sleeve	S	S	S	S	S	S
Lamp Indicator Light(s)	S	S	–	–	–	S
Sight Port to View Lamp Operation	–	S	S	S	S	S
HMI Touchscreen	–	–	–	–	–	R Series Models
Drain Fitting	–	–	–	S	S	S
Dual Action Wiper Mechanism	–	–	–	–	Manual	Manual or Automatic
Suggested Mount Installation	Horizontal	Horizontal	Vertical	Horizontal	Horizontal	Horizontal
Removable or Rotatable Heads	S	–	–	–	S	S
Alternate Inlet/Outlet Fittings	–	–	–	–	O	O
Sediment and Carbon Filter	S	–	–	–	–	–
Promate™ Mounting Kit / Bracket	S	S	S	O	O ①	–
GUARDIAN™ Germicidal UV Monitor	–	–	–	O	O	S
GUARDIAN™ ASSIST UV Monitor Extension	–	–	–	O	O	–
SENTRY™ Safety Sensor	O	O	–	O	O	–
Promate™ Audio Alarm	S	S	S	O	O	–
Promate™ Solenoid Valve	–	O ②	–	O	O	–
SureFLO™ Flow Control Valve	O	O	S	O	O	–
Promate™ Elapsed Time Indicator	O	O	–	O	O	S
Promate™ Time Delay Mechanism	–	O	–	–	–	–
Residential Use	✓	✓	✓	✓	✓	–
Commercial Use	–	–	–	✓	✓	✓
Industrial Use	–	–	–	–	✓	✓
 Certified Models	–	–	–	–	✓ ③	–

① **SANITRON®** Model S10,000C through S25,000C come equipped with mounting rack.

② Available for **MINIPURE®** Models MIN-3, MIN-6, and MIN-9 only.

③ **SANITRON®** Models S37C, S50C, and S2400C are certified to NSF®/ANSI/CAN 61 & NSF®/ANSI 372. Model S2400C is used in modular form to build larger models.

• When used as directed to disinfect clear water, Atlantic Ultraviolet Corporation® water purifiers provide an ultraviolet dosage in excess of 30.0 millijoules per square centimeter (mJ/cm²).

• This list depicts options for 120v 50/60Hz operation. Consult factory for options with other power requirements.



375 Marcus Boulevard
Hauppauge, NY 11788

CALL:
(631) 273-0500

E-MAIL:
Sales@AtlanticUV.com

LEARN:
Ultraviolet.com

SHOP:
AtlanticUltraviolet.com

 **ASSEMBLED IN THE USA**

GERMICIDAL ULTRAVIOLET EQUIPMENT & LAMPS • MANUFACTURERS / ENGINEERS / SALES / SERVICE

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.